

FRITSCH

Competence in SMT

Fritsch GmbH
Bestückungs- und Montagesysteme
Kastler Straße 11
D-92280 Kastl-Utzenhofen
Germany

Tel. +49(0) 9625-9210-0
Fax +49(0) 9625-9210-49

www.fritsch-smt.com
info@fritsch-smt.com

TIME IS MONEY
TIME IS MONEY

FRITSCH

Competence in SMT

placeALL® 600 placeALL® 600L



Basic devices

Hardware

Software

Options

Contact

Modern SMT-manufacturing challenges the producer with new requirements. Former arguments, which were crucial in the past aren't as important today. New requirements emerge instead and can't be served by outdated machinery efficiently.



An important reason for a modern Pick&Place system is decreasing lot sizes accompanied by increasing component-complexity, which can be produced more cost-efficient. A large amount of modern products use a high degree of Fine-Pitch components and BGAs besides other popular SMD-parts. Whereas placing speed was the ultimate goal formerly, it isn't that important anymore today. Much more crucial is the reduction of setup times and the increase of placement quality from lot 1 onwards. Average lot sizes today are often less than 100 units.

High flexibility together with a highly accurate and fast placement of components is imperative in today's manufacturing.

The **placeALL® 600** and **600 L(arge)** provide a series of hard- and software tools, which ensure high profitability. They were developed precisely for today's needs and offer :


placeALL® 600 • placeALL® 600L

- **Fitting up to 284 parts simultaneously on one system**
- **Modular system**
- **Placing up to 6000 parts per hour**
- **Automatic feeder recognition**
- **Universal CAD data converter for all file formats**
- **Lot size 1 standard**
- **Component library with over 300 parts**
- **Extendable to smartLINE 600/1200/1800**
- **Inline-capable using SMEMA-standard**
- **Dispense system for glue or soldering paste**
- **Fine-Pitch down to 0,3mm lead pitch**
- **Automatic reference-marker- and bad-circuit-board-recognition**


Basic devices

The **placeALL 600** is a modular built system and offers a placement capacity of up to 6000 components per hour. The stable and anti-warp assembly allows the handling of component sizes down to Fine-Pitch of 0.3 mm, μ BGAs and 0201 parts.

With maximum 208 feeding positions and intelligent software the setup times are reduced to an absolute minimum. The Pick&Place system can be integrated into a production line using the SMEMA-standard inline conveyor or operated as a standalone machine.

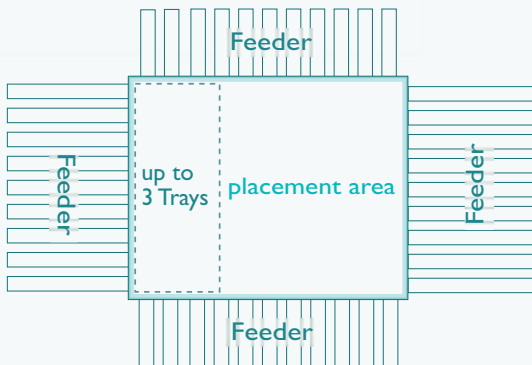

schematic diagram

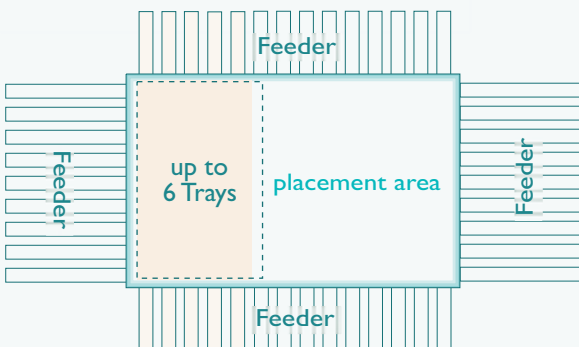

schematic diagram

The **placeALL 600L(arge)** comes with a bigger placement area than the placeALL 600. With this comes a larger 286 feeder capacity and a maximum of 6 trays can be used. Optionally the whole placement area can be used for handling big circuit boards (up to 920 x 360 mm).


The available hardware options and the software modules (PAJobs, PAStorage etc.) as well as the feeders are the same as with the placeALL 600. This gives you the easy possibility to work parallel with multiple machines or to link them.

Component centering

The component centering device is an essential part of the Pick&Place machine. It aligns the components exactly before placing them. This is most important for leaded Fine-Pitch-parts, BGAs, CSPs, μ BGAs and other special components. There are different kinds of centering devices: Laser centering, optical (Vision)-centering and mechanical centering devices for special tasks. Each of them can be assigned to particular tasks and components.


Laser Centering (on the fly)


The patented laser centering device from **CyberOptics®** company projects a laser beam using a laser-diode on the component surface. By rotating the component and analyzing the shadow length, the part is centered. This centering device is mounted directly to the assembly head eliminating side trips. The angle- and position-measurement is processed on the fly, while the head is moving. A lot of time is saved compared to stationary centering systems. The device can handle 0402 chips and parts up to 20x20mm border-length (optional 30x30mm) and a pitch of 0.5mm.

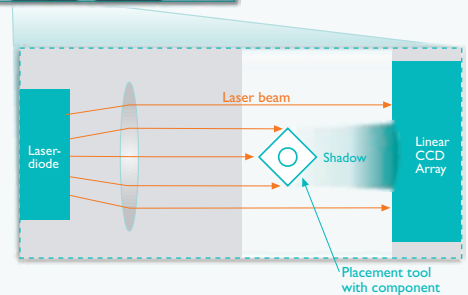

Optical Centering (Vision System I)

This stationary vision system can be integrated into the machine when needed. The camera takes a picture of the component and a computer analyzes it. The image recognition software measures each of connection points or the outside shape of the part and calculates a correction factor. With this system the machine can handle components as small as 0201 up to Fine-Pitch-parts of 0,3mm pitch, BGAs/CSPs/ μ BGAs up to 50x50mm in size (optional 70x70mm) and special parts accurately.

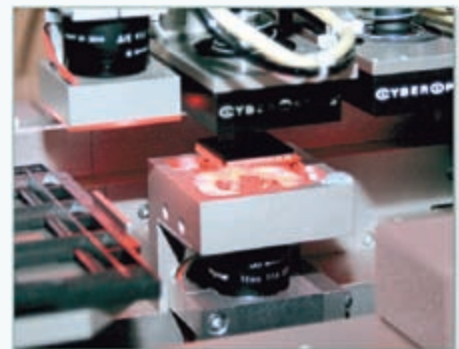

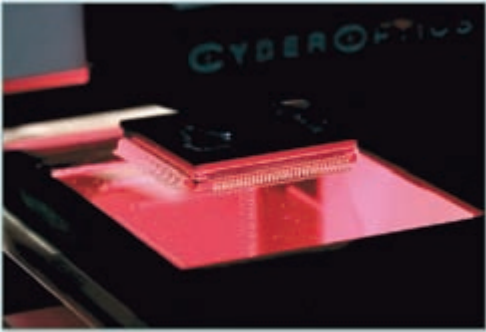

Optical Centering (Vision System II)

This vision system can measure components up to 48x48mm size. By taking a camera picture of the part the image recognition software measures the leads of Fine-Pitch components and the bumps of BGAs during the analyzing process. The software checks, if the leads are all even or if all bumps of the BGA are present. Only in this case the component is placed. A higher placement rate is achieved by this and defective parts are excluded. The Vision System II can handle Fine-Pitch parts with a pitch down to 0,4mm, 0201 components, BGAs/ CSPs/ μ BGAs and custom models up to 48x48mm. It can be built directly into the placeALL 600 at Fritsch or upgraded in the field at your factory location at any time.



Mechanical centering

Using this method the components are centered in x- and y-direction after pickup by the placement head using a sensitive mechanical jaw system, which is mounted directly to the head. This process is only used for custom parts (which are mainly realized outside the SMD world) as the laser and vision systems are faster and more accurate.

Zuführungen

Um mit dem Handmanipulator Prototypen und kleine Serien zu produzieren, sind verschiedene Zuführungsmöglichkeiten einsetzbar. Diese ermöglichen die Verarbeitung von Rollen, Stangen, Schüttgut, Gurtabschnitten und Trays und vereinfachen die tägliche Arbeit.

Tape-Feeder



Durch den Einsatz von Tape-Feedern können Standardbauteile in großen Mengen am Arbeitsplatz bevorratet werden. Beim Abziehen des Deckbandes wird der Gurt automatisch vorgeschoben und die zu verarbeitenden Bauteile werden freigelegt. Die Tape-Feeder sind in allen gängigen Breiten verfügbar und können an jedem Manipulator verwendet werden.



Stangen-Feeder




Stangen-Feeder ermöglichen das Zuführen kompletter Bauteilstangen, so dass diese empfindlichen Bauteile nicht unnötig umgefüllt werden müssen. Es können einzelne oder mehrere Bauteile für die aktuelle Verarbeitung freigegeben werden.



Drehteller manuell



Durch den Einsatz eines Drehtellers kann Schüttgut zugeführt werden. Es können mehrere Drehteller für unterschiedliche Projekte vorbereitet werden, die sich mit einem Handgriff wechseln lassen.

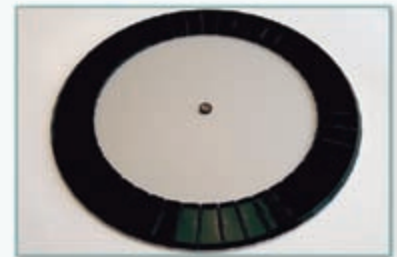


Paternoster/Drehteller autom.



Diese automatischen Zuführeinheiten können bis zu 504 Bauteile zur Verfügung stellen. Mittels der PC-Ansteuerung wird das jeweils zur Bestückung benötigte Bauteil zu einer fest definierten Entnahmeposition befördert und durch die integrierten LED's angezeigt. Beide Systeme können alternativ mit einem Fußtaster manuell verfahren werden.

Der Einsatz dieser Zuführungen bietet sich in Verbindung mit den Halbautomaten der SM-Serie an.

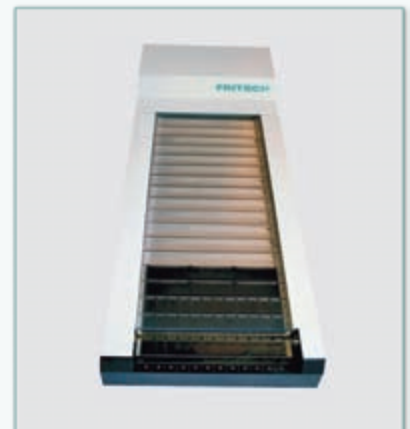

Feeder types

The pick&place machine can be equipped with different component feeder types :

- Single-feeder for taped components on 8, 12, 16, 24, 32, 44, 52 and optional 72mm reels
- Stick feeders for 5, 10 or 20 sticks
- Universal receiver for belt sections
- Tape-strip feeders
- Custom feeder for special components (rivets, leaded LEDs etc.)
- Tray-Changer

Tape feeder

To process SMD components which come on taped reels we offer tape feeder in the following width from 8mm, 12mm, 16mm, 24mm, 32mm, 44mm, 52mm and optional 72mm. All this feeders come as standard feeders and as smartFEEDERS (intelligent). The feeders can easily be fitted to the machine without having inaccuracies. For feeding 0201 and 0402 components we offer half step feeders, which guarantee the short feed distance.



Block feeder

To keep setup cost of projects and jobs as low as possible offer block-feeders double the number of 8mm tapes as normal feeders. This allows a large part count standard set-up on the system possible. Only a few project specific components then need to be changed when changing set-ups. Even in an inline system can you have up to 200 different component values on board, all block feeders are build as smartFeeders so the position of the feeders and values on the machine are recognised and the user is advised of the actual feeder details. The set-up of these feeders can be done easily using a barcode reader.




Stick feeder

The compressed air driven stick feeder concept makes it possible to feed different size components side by side. During the feeding a pneumatic cover protects the components and makes it possible to feed them safely and reliably. Our stick feeders are available in 5, 10 or 20 stick blocks.




Tray-Changer

The tray changer manages the trays and presents the correct one to the system at the required times, making it easy to produce jobs with many tray components.

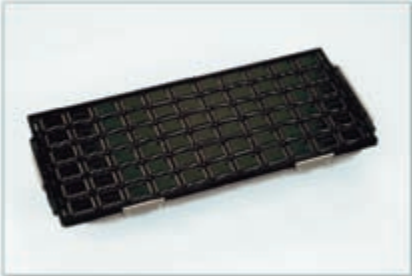

System automatically recognizes the attach-position of the scanned smartFEEDER

Scanner data



Scanning of



Feeder - Barcode



Tape - Barcode

Tape-strip feeder

This feeder-type is especially used for the assembly of prototypes. The belt-section feeder delivers up to ten 8 mm (or less) belts simultaneously.

Tray feeder

Multiple trays can be used in the total assembly area of the machine. Therefore the assembly space can be adapted to different projects.

Custom feeders

FRITSCH combines research & development, design and production completely in-house. Therefore we can handle customisation tasks, where the standard feeder-types cannot be used, i.e. rivet placing, leaded LED's, etc. Just ask us!

LED - Feeder

These feeders have been developed together with some of our customers to handle leaded LED's. They are cut at a defined height and are then supplied for placement with the assembly head. Assembly of a big matrix-display is fast and easy with this feeder-type.

smartFEEDER


smartFEEDER are intelligent feeders that come with a built-in microprocessor control. The smartFEEDER permanently communicates with the placeALL machine. This produces the following advantages:

- Feeder position is recognized automatically during a feeder scan
- No re-programming at feeder-exchange
- Component description and quantities are stored directly in the feeder
- Replenishment is possible during production
- Free feeders are displayed on the monitor using different colors
- Display of part shortage using a minimum-level-warning (requires PASTorage)
- 100% setup-security

This optimizes production planning, gives you flexibility and reduces setup times.

Circuit board mounting

With the universal circuit board quick-clamp system for single- or double-sided boards with different sizes can be locked into position. Under board support pins can be freely inserted to support especially large circuit boards. Alternatively chamfered board pins can be used. To handle flexible boards a vacuum tooling can be integrated into the placeALL machine. Tooling frames for single circuit boards and customer-specific seatings can be realized directly in-house.

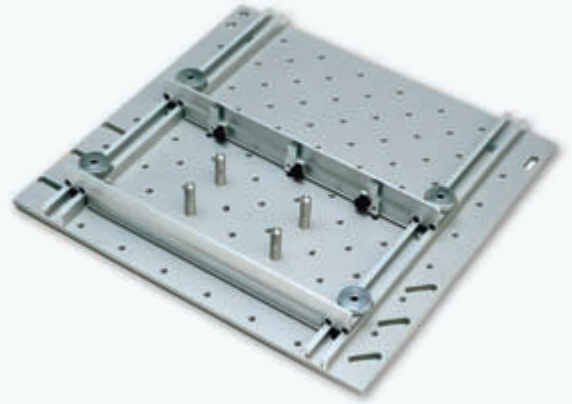

Automatic tool changer

The automatic tool-change station is driven pneumatically. All common components can be placed using the four spring-loaded vacuum tools, for Fine-Pitch parts separate placement-tool is supplied. All important information, i.e. programmable placement pressure or which tool should be used to place which component is stored in the component library.



Machine frame


All FRITSCH automatic Pick&Place machines come with a solid heavy welded frame to ensure a warp-resistant construction. The DC-motors, the linear guides and the linear encoder (0.001 mm resolution) come from well-known manufactures and allow the precise handling of every component.

Software

Operation and programming

The user interface is menu-driven and works under Windows XP. The clearly laid out software guides the user step-by-step to the objective. To setup a new project or alter an existing one, each of the steps (see picture on the left) are run-through from top to bottom. For each step the parameters can be simply chosen with a mouseclick. Furthermore the user can rely on a detailed help system for each point. The smartASSISTANT monitors all actions, gives advice and shows every error source in plaintext, so the handbook-browsing is omitted.

Integration into an existing network is trouble-free.

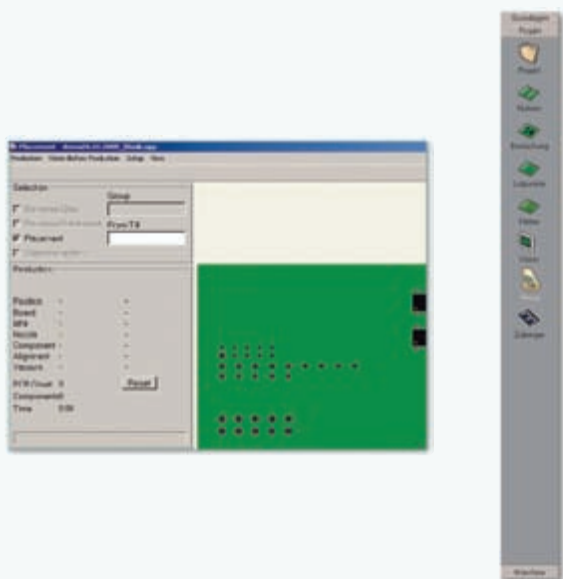


Component library

The integrated component library holds all assembly and model data of each component. These are :


- Component dimensions
- Traverse speed
- Placement tool to be used
- Adjustable vacuum levels
- Centering type (laser, Vision or mechanical)
- Coordinates and volume of glue or solder paste dots
- Pin-I-display and Vision control points

The supplied spectrum of over 300 different component parts covers nearly all possibilities of everyday use. The library is one of the biggest on the market in this category. If however a part is not part of the standard library it can be easily added using the provided graphical editor. This tool can also be used to modify existing parts of the library.

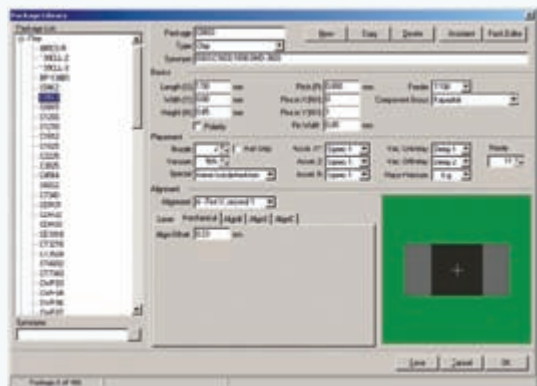

Component editor


If components are used, which are not included in the 300 parts in the library, a graphical component editor is at your hands. This new parts can be realized in a few simple steps, together with specifications of glue and solder-paste dots.

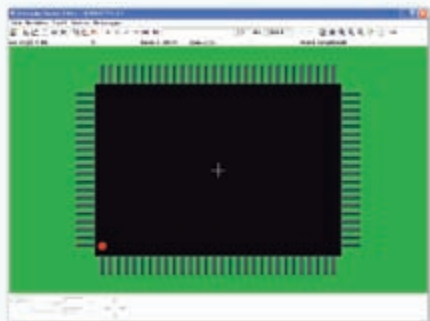

Teach In



It is possible to enter the placement positions manually into the placeALL machine, for this the user drives the teach-in camera to the desired position. A virtual component is displayed in the camera window (see picture on the right). This virtual part can then be aligned exactly and brought into the correct position. After teaching this position the data is added to the program. Displaying a virtual component is a big advantage compared to the traditional basic crosshair.

This manual type of machine programming plays a less important role these days. In most of the cases CAD data is available or provided, this can be imported directly in to our systems reducing programming time dramatically.

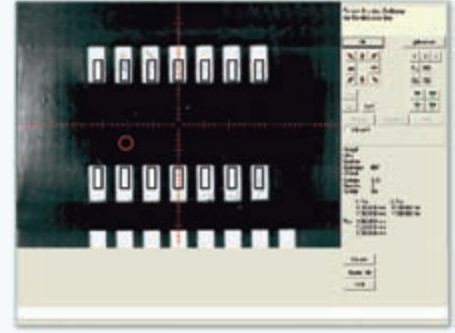


CAD - data conversion


Our universal CAD data conversion module is part of our standard placeALL software. It marks the conversion between the CAD system and the placeALL machine. Using a conversion editor program, all CAD systems can be converted easily in a few software guided steps. Different setup files can be saved and reloaded when required. Therefore the conversion process takes very little time and can be carried out offline on a separate workstation leaving the placeALL all the processing power for the core tasks of assembling circuit boards. (more details at "component library")

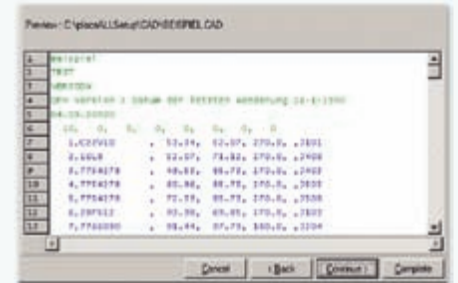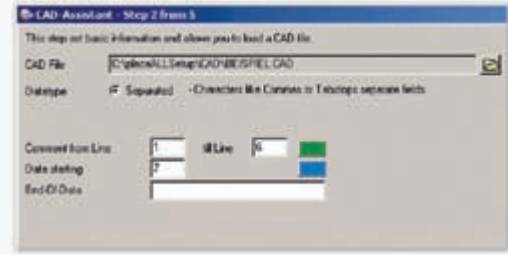

Optical inspection


After transferring the CAD data into the machine, the virtual data verification can be used to simulate the assembly process. The camera is therefore placed above the circuit board to be assembled. At each stop position the virtual component is displayed virtually/graphically. The part and the position can be checked and corrected if necessary. By this method prototypes can be produced error-free without wasting much time. You also can check already assembled circuit boards with this system too.

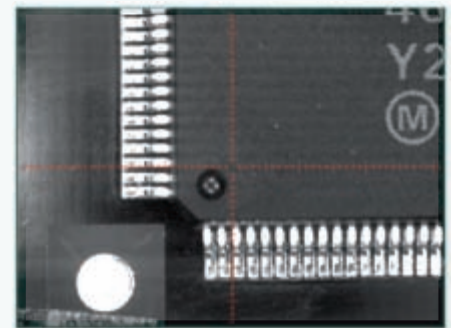

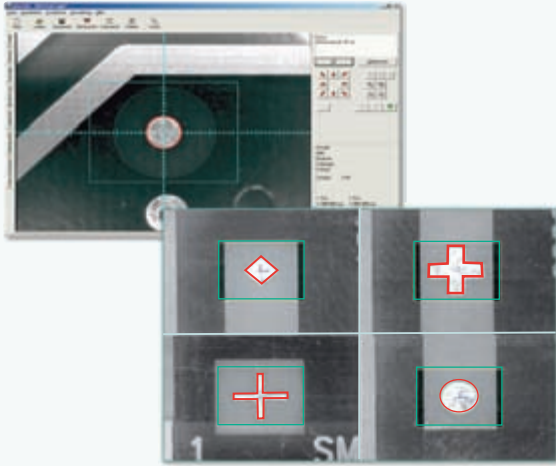

Automatic reference-marks and bad circuit board recognition

This option allows the automatic recognition of reference marks (fiducials) on circuit boards. The system is also recommended for use with an inline transport system. For PCB offset correction a mark (dot, cross, ring etc.) on the circuit board can be utilized. During the assembly of multiple PCBs in a panel, bad single boards can be marked manually for exclusion. These boards are recognized by the system and are skipped automatically.

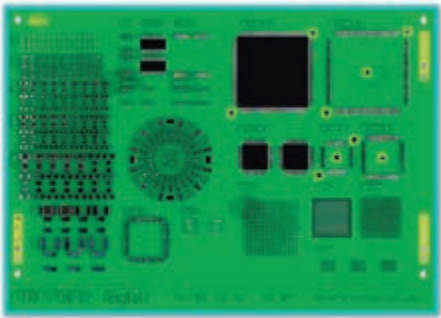


Viewing the assembly process on the monitor

To update the user about the current status of the process at one glance, the circuit board and virtual assembly of components are displayed during actual production. This means, that as soon as a component is placed on the circuit board, this part is added on the display too.



Virtual quality inspection

To ensure correct placement of the components after assembly, the virtual quality inspection was developed. All placement positions are shown one after the other and you can check polarity and rotation of the component on the monitor.

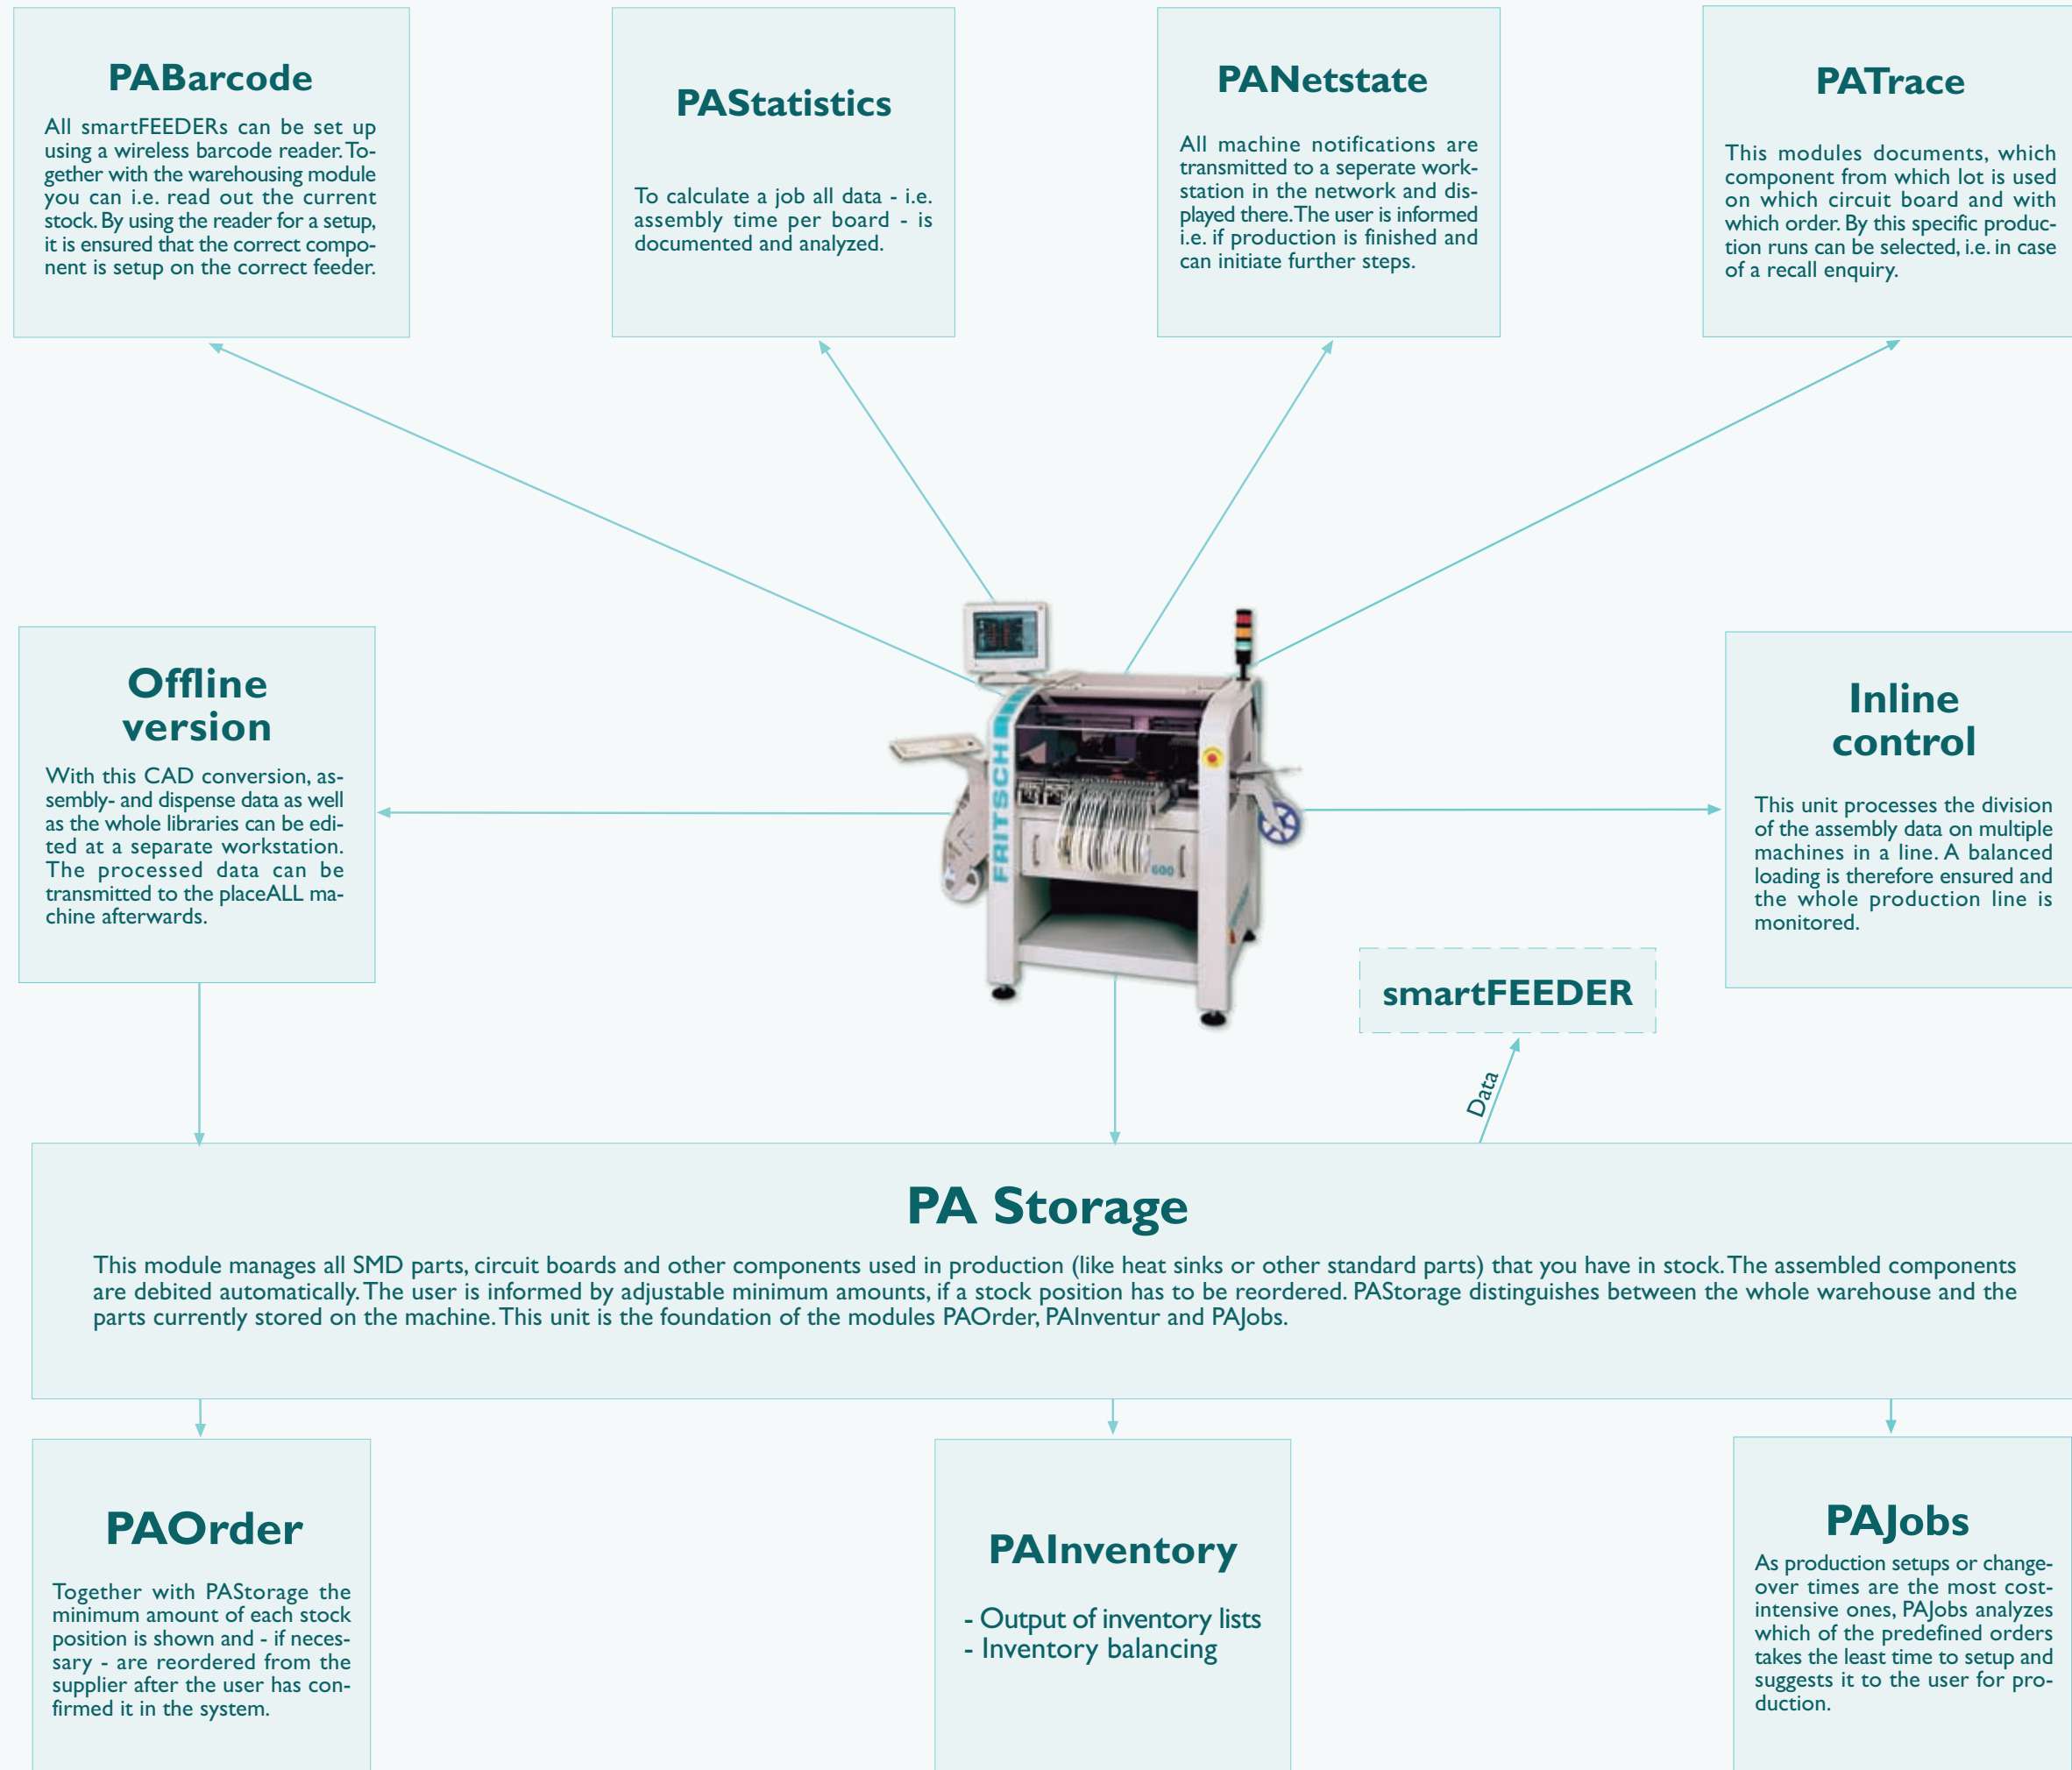


Variant assembly

These days some circuit boards are produced in different variations. The placeALL software can manage them independently. For the production of such PCB's only the corresponding letter combination has to be entered, the preset combination is then assembled by the machine in production.

An example:


If a project consists of several different configurations, the components of the basic version can be marked with "A". The first extension is referred to with "B", the second one with "C". Now a series "AB" (basic + extension B) or an "ABC" variant (basic + extension B and C) can be produced easily (see right picture).

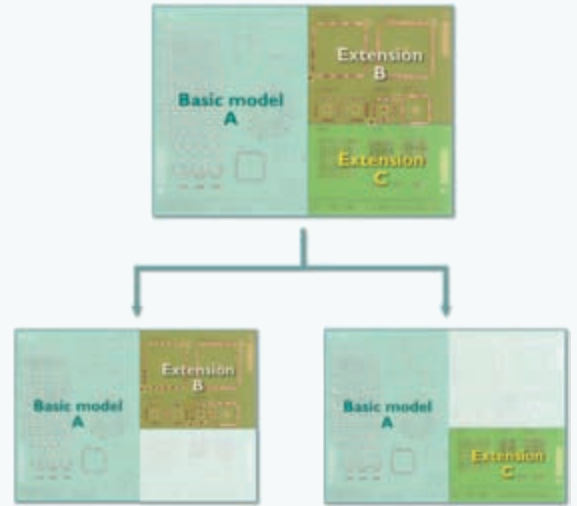

Mixed matrix-boards

To utilize the assembly area to the maximum degree, different products can be processed in one production run.


Mixed matrix-boards can be used, in which different board types are combined. The software optimizes the assembly for all defined projects.

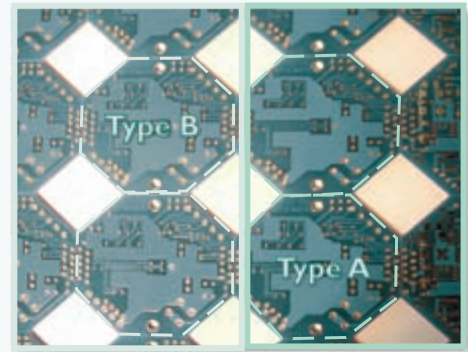

Placement optimization


Prior to the production start the optimal assembly path is calculated. Optionally the software displays, which feeder positions would reduce the assembly paths further, increase placement speed. This time saving brings a lot especially when a large number of boards are produced.

This optimization is used in a similar way for the dispensing process (see right picture).

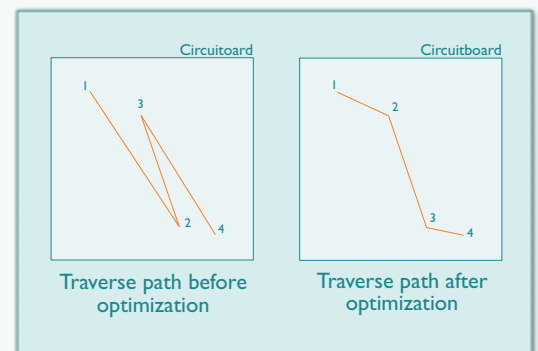

User management

The user's administrator makes it possible to grant different rights to different users. You can define who is able to alter programs or update component libraries. These rights can be edited simply by clicking on the different production steps in the software.

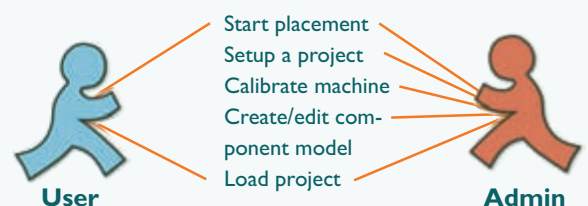


Options/extensions

Modular layout

During the machine's development we focused on field upgradeability. By this the following options are available :




- Upgrading a second assembly head
- Inline conveyor
- Vision centering
- Dispensing system
- Automatic reference-point and bad multiboard recognition
- Split machine frame
- Software modules
- Service kit

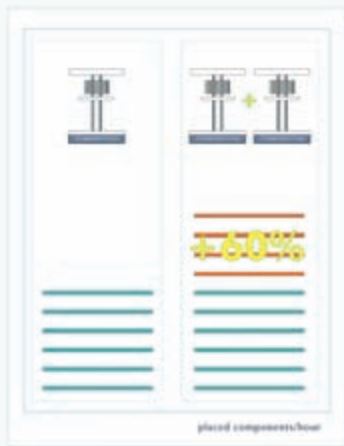

Upgrading to a second assembly head

Following the slogan "grow with time" the second assembly head can be added to the placeALL system. The placing speed increases up to 6000 components/hour. The extra cost is just a fraction compared to buying a complete second machine.

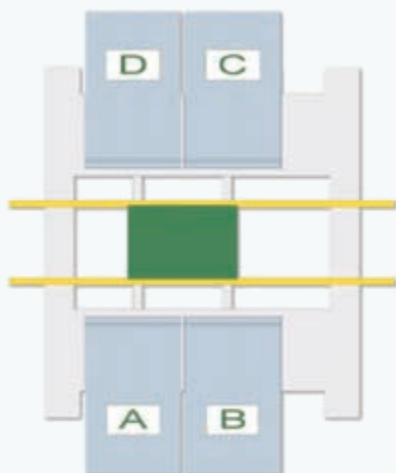

Inline conveyor

The Inline conveyor system enables you to build a complete classic production line. This allows for both connecting the reflow systems as well as linking multiple placeALLs and transfer systems. When the circuit board enters the machine it is brought into position by a pneumatic stopper and fixed for production using an automatic lifting plate with adjustable under board support pins. The control follows the international SMEMA standard, READY contact or custom specifications.

During Inline mode the placeALL 600L can handle up to 200 feeders.


Vision centering

All vision centering methods can be installed on demand at any time. Details can be found on pages 4 and 5 of this brochure.

Dispensing system

For producing prototypes and small series it is better to dispense glue or solder paste automatically and assemble the components in a second step. We offer two different types of dispense systems:

The simple time-pressure system is normally used for glue or normal pitch components. With the patented CD-04 system a highly repeatable process is ensured by using additional parameters like temperature or cartridge fill-level as well as through the processor driven adjustments. Therefore it is possible to safely dispense volumes from 0,001 to 10 mm³. By this Fine-Pitch components down to 0.50 mm can be dispensed.

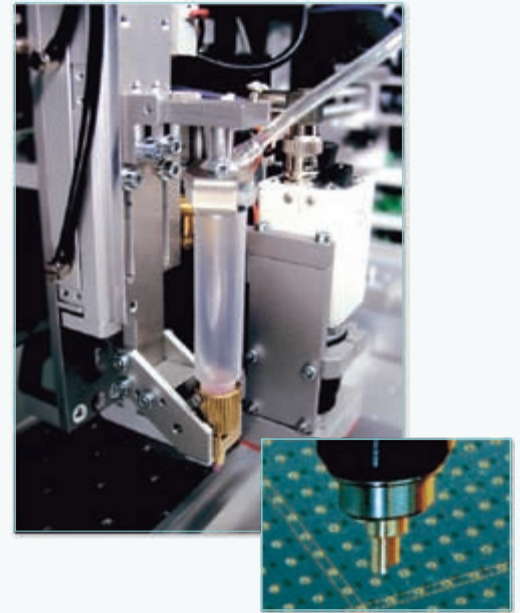


Automatic reference-point recognition

The automatic reference-point and bad circuitboard recognition can be installed on demand at any time. Details can be found on page 11 of this brochure.

Split machine frame

To pass narrow doors of 800mm width during installing of the placeALL machine, the machine frame can be build in two parts to ensure that both frame parts are smaller than 800mm. Installation is done on location.

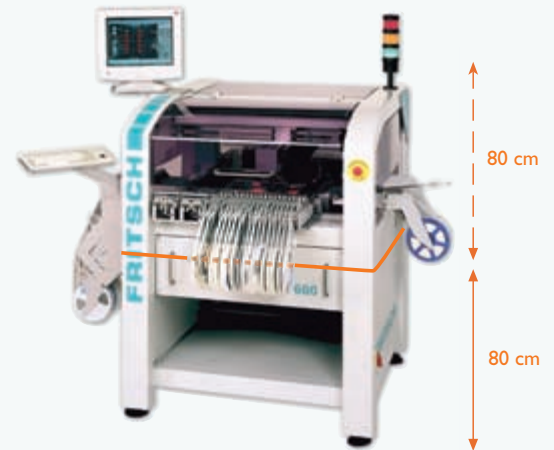


Software modules

All modules described on page 12 and 13 of this brochure can be added to the software at any time.

Servicekit

The service kit provides the remote dial-in to the placeALL software, enabling our service staff to assist you in solving questions regarding installation or upgrading. You the customer has to approve the dial-in each time. With this method we can do remote diagnostics on possible problems and help you quickly.

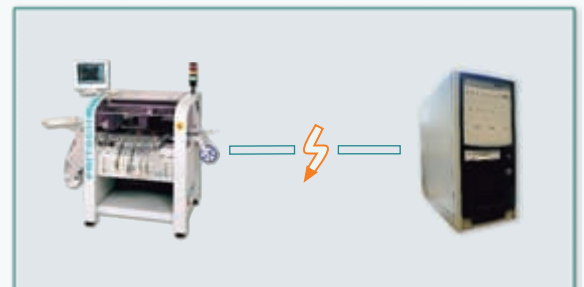

Production lines

To build up a complete Pick&Place production line, more components are available, that can be attached to the placeALL machine. By this the handling is much easier and a higher process security is ensured.



Loader/Unloader

The loading and unloading units represent the beginning and end of the whole production line. 50 circuit boards can be delivered to the placeALL machine one after the other. After the assembly and soldering process they can be stacked using the unloader.



Reflow Oven

Different stand-alone or In-line capable reflow soldering systems (with approved glide-zone heat-chamber system) are available for lead-free or leaded soldering or the curing of glue. Profiles of components and boards can be easily measured and analysed using the integrated thermal sensor. Several multi-channel measuring instruments are also available.



Machine linking

Multiple placeALL machines can be linked to achieve a higher placement capacity and more flexibility. The placement positions are divided on demand, so either one product is assembled in both machines in half the time or two different products are processed at the same time. As the feeder capacity is also increased, setup times are reduced.



Stencil printers

To apply solder paste or glue on the circuit board, manual or semi-automatic stencil printers are available. Semi-automatic printers have an auto driven double squeegees with settable print pressure.

Custom solutions

We implement several custom applications per year, based on our standard Pick&Place products. If a project requires special demands, we develop, design and produce it all under one roof, direct and one channel communicating with you as our customer.

other machines


Classic Line

Fritsch offers several manual and semi-automatic Pick&Place machines for building prototypes or producing small series. These manipulators offer all process steps, from dispensing solder paste/glue to placing components including Fine-Pitch. The devices can be equipped with tape or stick feeders depending on the practical usage.




μPlacer

The μPlacer is a selective placement and rework system. It can handle BGA, CSP, Fine-Pitch and Custom components. All process steps like soldering or de-soldering, placing parts, reballing or old solder-removing can be carried out efficiently. During soldering the μPlacer offers the possibility to monitor the melting process or to inspect hidden solder balls afterwards.

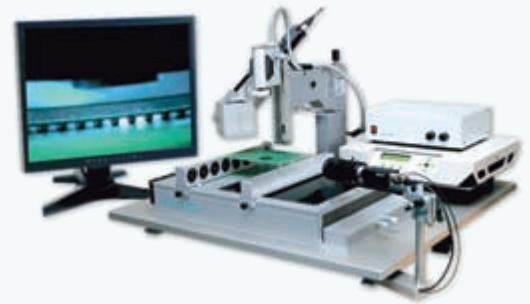


Worldwide support

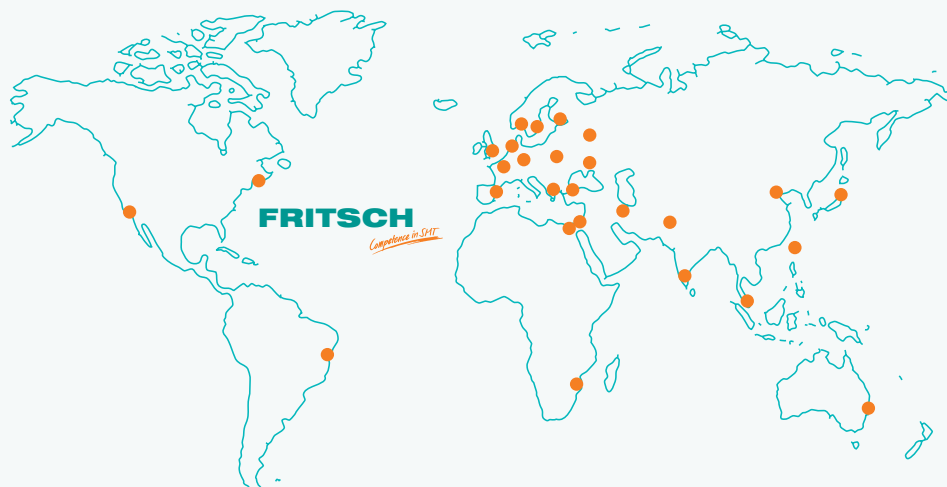

A worldwide distributor network guarantees the support of all **FRITSCH** products. Specially trained service personal is available in each country. To expedite the fast supply of devices and spare parts, these are stored at the corresponding service point.

Worldwide Fritsch distributors

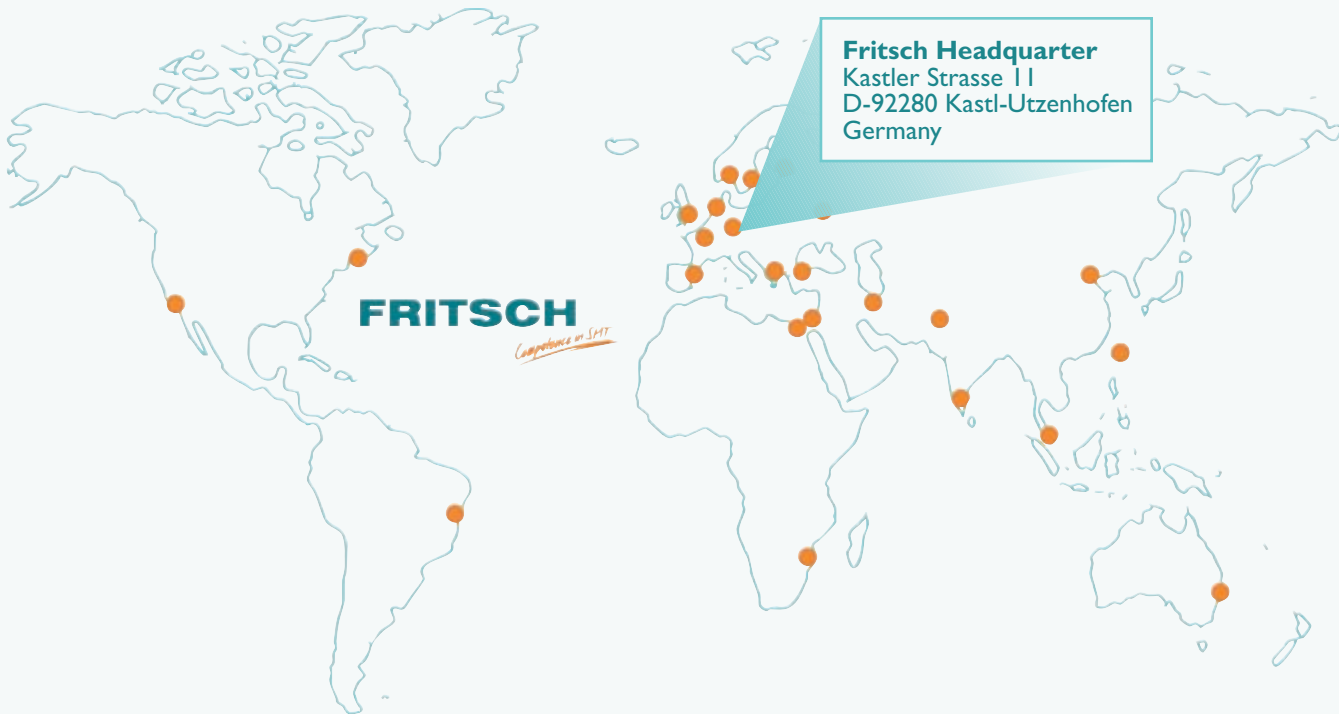

Distributor in your country

Fritsch Headquarter
Kastler Strasse 11
D-92280 Kastl-Utzenhofen
Germany

fon +49 (0) 96 25 / 92 10 -0
fax +49 (0) 96 25 / 92 10 -49

www.fritsch-smt.com
info@fritsch-smt.com

Basic devices

Hardware

Software

Options

Contact